




Hinged Screen Door Closer

ASSA ABLOY Suits hinged screen and security doors up to 21kgs

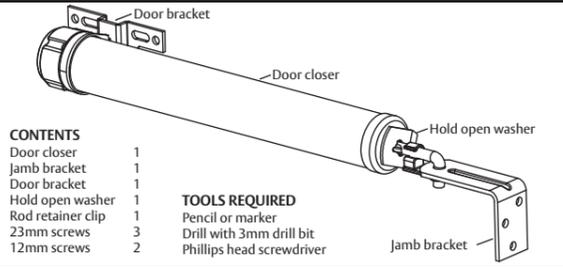


CONTENTS

Door closer	1
Jamb bracket	1
Door bracket	1
Hold open washer	1
Rod retainer clip	1
23mm screws	3
12mm screws	2

TOOLS REQUIRED


Pencil or marker
Drill with 3mm drill bit
Phillips head screwdriver

1 Preparation of the Reveal




- Hold jamb bracket against hinge side jamb. Position bracket 40mm down from frame head with a gap between door and bracket of 12-25mm.
- Mark and drill 3 holes and fix bracket to jamb using 25mm screws.

2 Hold Washer & Orient Rod



- To pre-load screen door to allow self latching, start by extending the rod. Place the hold open washer against the flats by rotating a 1/4 turn on the rod. The result being that the rod cannot be pulled through the washer slot. Slowly release the rod and remove your fingers so that the washer touches the cylinder.
- Place your thumb on the washer and your finger on the rod. Twist the cylinder to correctly orient the rod to fit into the jamb bracket relative to closer tongue.

3 Preparation of the Door




- Place the end of the rod into the jamb bracket.
- Place closer in the door bracket slot.
- Position door bracket level on door and mark slotted hole. Remove closer and drill 3mm hole in centre of outer slot to fix bracket with 12mm screw to door allowing horizontal adjustment.

4 Adjust Speed



- Refit closer. Disengage the hold open washer and try closer for correct operation of the screen door.
- Adjust closing speed by turning the knob. Fast and slow direction identified on the knob.

5 Fix Door Bracket



- When satisfied with the closer operation, remove closer and drill hole in inner hole. Fix 12mm screw through hole ensuring that slotted screw is secured onto bracket.
- Refit closer.
- Clip rod retainer into position over rod and through end hole.

Please Note:

- Ensure door closes freely before you install door closer.
- For normal outward opening doors, door closer must be installed on the inside, hinged end of the door. For inward opening doors, the door closer is on the outside.
- When replacing an existing door closer, ensure all parts are replaced, including door and jamb mounting brackets.
- Maximum door opening angle is 90 degrees.
- In the instance of door closing too slowly, pull door shut rapidly. Adjust knob for correct closing speed, if required.

lockweb.com.au
1300 LOCK UP (1300 562 587)

ASSA ABLOY Australia Pty Ltd
235 Huntingdale Road,
Oakleigh VIC 3166
ABN 90 086 451 907 ©2010

Made in ASSA ABLOY's China plant to exclusive Lockwood specifications and quality standards.



PKG140809_051