Padlock Range



We take the worry out of protecting what's valuable to you. Lockwood: no worries®







Contents

Value Range



110 Series

Brass Body Padlocks

page 7



141 Series

Combination Padlock

page 9



150 Series

Combination Padlock

page 11

High Security



120N Series

Brass Body Padlocks with Silicone Jackets

page 14



334B Series

High Security Brass Body Padlocks

page 16



334S Series

Steel Body Padlocks

page 18



334C Series

Shrouded Steel Body Padlocks

page 20



334M Series

Stainless Steel Body Padlocks

page 22

Maximum Security



270 Series

Steel Body Padlocks

page 25



290 Series

Steel Body Monoblock Padlocks

page 27



301 Series

Steel Body Padlocks

page 29



356S Series

Steel Body Padlocks

page 31



356M Series

Steel Body Padlocks

page 33

Contents

Padlock Accessories











Padbolt

Locking Plates

Locking Plates with Shackle Guard

Hasp and Staples

Hasp and Staples - Hinged

page 37

page 39

page 41

page 43

page 45





Hasp and Staples - Heavy Duty

Padlock Chain

page 47

page 49

Safety Lockout Padlocks





214 and 215 Series

Aluminium Body Padlocks

page 52



215P Series

Plastic Body Padlocks

page 54



225 Series

Padlock

page 56



325 Series

Padlock

page 58



312 Series

Padlocks

page 60

Contents







312

Safety Lockout Hasp

page 62

214 and 215 Series


Aluminium Body Padlocks

page 64

215P Series

Plastic Body Padlocks

page 68

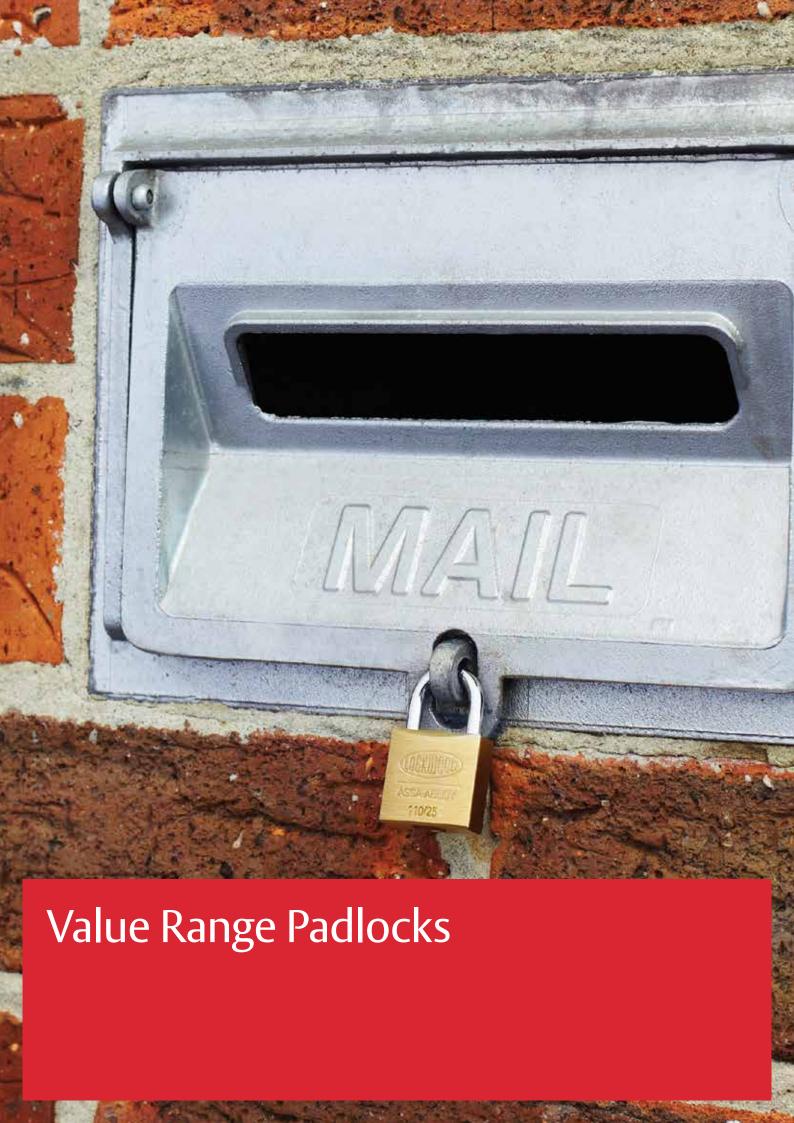

Value Range Padlocks 110 Series Brass Body Padlocks



The Lockwood Solid Brass 110 Series Padlocks are designed for barrier and deterrent level protection in applications such as school lockers and letter boxes.

Features

- Pin tumbler mechanisms
- Self-latching shackle function
- Single locking on 20 and 25mm padlocks
- Double locking on 30, 35 and 40mm padlocks

Product Details					
Materials	Body: Brass. Shackle: Hardened steel.				
Function	Spring loaded shackle with latching function where the key can be removed with the shackle in the open position.				
Finish	Body: Natural material. Shackle: Chrome plate.				
Shackles	Available in a variety of diameters and lengths. See specifications section for available options.				

Standards and Compliance

UP TO GRADE SP4 Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade range up to Grade 4.




Corrosion Resistance Rating C2: Environments that are normally dry, including the majority of interiors.



Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.

Value Range Padlocks 110 Series Brass Body Padlocks

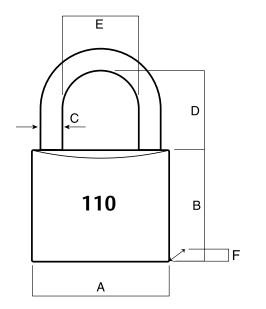



Specifications												
	Dime	Dimensions (mm)										
Part Number	Α	В	c	D	E	F	Physical Security Rating	Corrosion Resistance Rating				
110/20/111	20	20.0	3.2	11	10	11	-	C2				
110/25/115	25	24.5	4.0	15	13	12	SP1	C2				
110/30/119	30	27.0	4.8	19	18	13	SP2	G				
110/35/121	35	29.5	5.5	21	19	13	SP3	C3				
110/40/123	40	32.5	6.4	23	22	15	SP4	C3				

Available Pack Variations							
Part Number	NDP	2NDP	4NDP				
110/20/111	•	•	•				
110/25/115	•	•	•				
110/30/119	•	•					
110/35/121	•						
110/40/123	•	•					

Value Range Padlocks

141 Series Combination Padlock



The Lockwood 141 Series Padlock is a 50mm stainless steel dial type combination padlock with key override. Designed as basic protection for barrier and deterrent applications such as school lockers where access by authorised staff is required.

Features

- Key override for immediate access by authorised staff
- Steel latch mechanism
- Brass 4 pin tumbler mechanism
- Brightly coloured dial for easy identification
- Positive three digit dialling gives maximum combinations
- Anti manipulation feature standard
- Automatic combination scramble when shackle is closed to prevent unauthorised reopening of padlock
- Keying and system management using Lockwood ProMaster software
- Combination code charts supplied with every order
- Available in RCKA (Random Codes, Keyed Alike) only

Product Details					
Materials	Body: Stainless steel. Shackle: Hardened steel.				
Function	Three code dial combination. Automatic combination scramble when shackle is closed to prevent unauthorised reopening of padlock.				
Finish	Body: Natural material. Shackle: Chrome plate.				
Shackles	8mm diameter, 22mm long shackle only.				

Note: Minimum order quantity and minimum pack size 50

Standards and Compliance


SP3

Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 3.



Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.

Value Range Padlocks 141 Series Combination Padlock

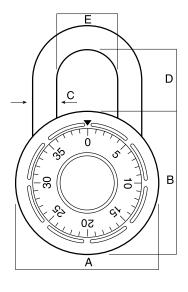



Specifications								
Dimensions (mm)								
Part Number	Α	В	С	D	E	Physical Security Rating	Corrosion Resistance Rating	
141/50/122*	50	50	8	22	21	SP3	C3	

Note: * = key code group

Value Range Padlocks 150 Series Combination Padlock



The Lockwood 150 Series Padlocks are brass body combination padlocks designed as basic protection for barrier and deterrent applications such as luggage and sports bags.

Features

• 1,000 resettable combinations

Materials	Body: Brass. Shackle: Steel. Wheels: Brass.
Function	Three / Four code dial combination.
Finish	Body: Natural material. Shackle: Chrome plate.
Shackles	8mm diameter, 22mm long shackle only.

Note: Available in NDP (Display Pack) only

Product Details

Standards and Compliance




Corrosion Resistance
Rating C1: Not applicable.



Corrosion Resistance Rating C2: Environments that are normally dry, including the majority of interiors.

Designed and tested to the Australian Padlock Standard AS4145.4 2002 and are rated for corrosion resistance.

Value Range Padlocks 150 Series Combination Padlock

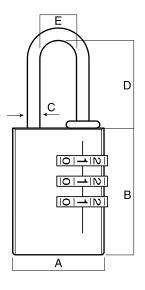



Specifications								
		Dime	ensions (mm)				
Part Number	Combination Dials	Α	В	С	D	E	Physical Security Rating	Corrosion Resistance Rating
150/25/118/NDP	3	25	31.5	3.2	22	10	-	C1
150/30/125/NDP	3	31	40.0	4.8	25	14	_	C2
150/40/130/NDP	4	40	48.0	6.0	30	20	-	C2



High Security Padlocks

High Security Padlocks

120N Series Brass Body Padlocks with Silicone Jackets



The 120N Series Padlock range includes 14 different models, with single, twin and quad packs (keyed alike), as well as extended shackle lengths for selected models.

All padlocks in this range come complete with jackets made from a tough silicone material which is weather resistant and UV stable to resist the impact of harsh environments.

The jackets also provide protection for both the padlock and the object to which it is attached.

The 120N padlocks are suitable for general purpose applications providing for a broad range of applications.

Features

- Pin tumbler locking
- Self-latching shackle function
- Multipacks (keyed alike) on some 30mm and 40mm variants

Body: Brass. Materials Shackle: Hardened steel. Cover: Silicon		
	Materials	Shackle: Hardened steel.

Spring loaded shackle with latching function where the key can be removed with the shackle in the open position.

positio

Product Detail:

Finish

Body: Natural material.

Shackle: Chrome plate.

Shackles

Available in a variety of diameters and lengths.

See specifications section for available options.

Standards and Compliance


SP2-6

Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade range from 2-6.



Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.

High Security Padlocks 120N Series Brass Body Padlocks with Silicone Jackets

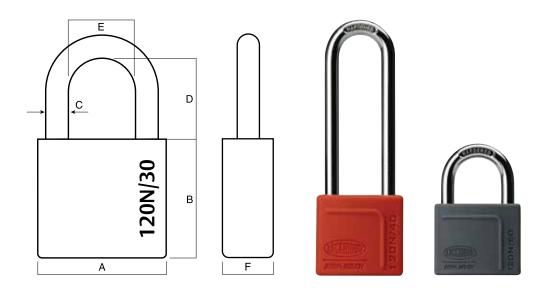

Specifications												
	Dime	Dimensions (mm)										
Part Number	Α	В	c	D	E	F	Physical Security Rating	Corrosion Resistance Rating				
120N/30/118	30	30	5.0	18	17.0	13	SP3	C3				
120N/30/150	30	30	5.0	50	17.0	13	SP2	C3				
120N/30/180	30	30	5.0	80	17.0	13	SP2	C3				
120N/35/123	35	32	6.4	23	18.0	15	SP4	C3				
120N/40/125*	40	37	7.1	25	21.0	16	SP5	C3				
120N/40/150	40	37	7.1	50	21.0	16	SP4	C3				
120N/40/180	40	37	7.1	80	21.0	16	SP4	C3				
120N/45/127	45	41	8.0	27	22.5	17	SP6	C3				
120N/50/132*	50	46	9.5	32	25.5	19	SP6	C3				
120N/60/135	60	50	10.0	35	35.0	20	SP6	С3				


Part Number	DP	2DP	4DP
120N/30/118	•	•	•
120N/30/150	•		
120N/30/180	•		
120N/35/123	•		
120N/40/125*	•	•	•
120N/40/150	•		
120N/40/180	•		
120N/45/127	•		
120N/50/132*	•		
120N/60/135	•		

Available Pack Variations

Please note: The extended shackle reduces the shackle resistance to twisting which reduces the overall security rating.

High Security Padlocks

334B Series Brass Body Padlocks

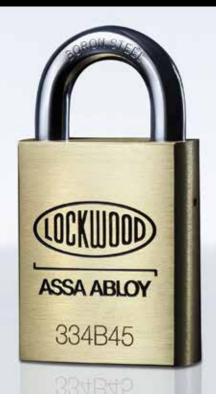

The Lockwood 334 Series Brass Body Padlock range features shackles suitable for commercial and industrial high security and high corrosion applications.

Features

- Double ball locking
- Stainless steel shackle models
- Standard as latching function
- Can be converted to deadlocking (key retained) by simply relocating the cam plate pin in the cylinder assembly
- Rapid change shackle

Product Details					
Materials	Body: Heavy duty, brass extrusion. Shackle: Boron steel.				
Function	Spring loaded shackle, available with latching function where the key can be removed with the shackle in the open position (L) or deadlocking function where the the key is retained and can only be removed with the shackle in the locked position (D).				
Finish	Body: Natural material. Shackle: Chrome plate.				
Cylinder	Rekeyable 334 type padlock cylinder. Inline pin cylinders can be keyed to 5 or 6 pins.				
Shackles	8.7mm diameter, 19, 25, 38, 48 & 90mm lengths.				
Special Keying	Locks can be keyed to a number of controlled and / or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication and can also include specially designed keying systems such as master key systems. This allows for different levels of mechanical access control. Bulk Locksmiths versions are available.				

Note: Custom marking is available. Pricing and availability on application.

Standards and Compliance

SP5-7


Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade range from 5-7.




Corrosion Resistance Rating C4: Environments that are often wet and/or subject to slight pollution by sulphur dioxide, acid, alkali or salt, including some particularly damp interiors and the majority of exterior environments.



High Security Padlocks 334B Series Brass Body Padlocks

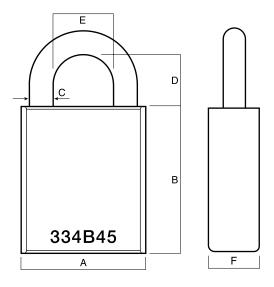


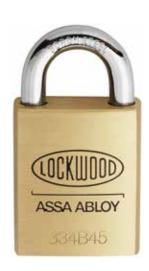

Specifications											
	Dime	Dimensions (mm)									
Part Number	Α	В	c	D	E	F	Physical Security Rating	Corrosion Resistance Rating			
334B45/119	45	55	8.7	19	22	20	SP7	C4			
334B45/125	45	55	8.7	25	22	20	SP6	C4			
334B45/138	45	55	8.7	38	22	20	SP6	C4			
334B45/148	45	55	8.7	48	22	20	SP6	C4			
334B45/190	45	55	8.7	90	22	20	SP5	C4			

Available Pack Variations										
Part Number	NDP	RKA	ВК	5KA	5KD	6КА	6KD	6МК		
334B45			•	•	•	•	•	•		
334B45/119	•	•	•	•	•	•	•	•		
334B45/125			•	•	•	•	•	•		
334B45/138	•		•	•	•	•	•	•		
334B45/148	•		•	•	•	•	•	•		
334B45/190	•			•	•	•	•	•		

High Security Padlocks 334 Series Steel Body Padlocks

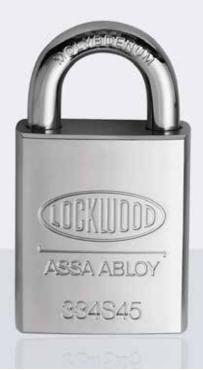

The Lockwood 334 Steel Series Padlock range features shackles suitable for commercial and industrial high security and high corrosion applications offering added protection against attack.

Features

- Double ball locking
- Standard as latching function
- Can be converted to deadlocking (key retained) by simply relocating the cam plate pin in the cylinder assembly

Product Details							
Materials	Body: Steel. Shackle: Molybdenum steel.						
Function	Spring loaded shackle, available with latching function where the key can be removed with the shackle in the open position (L) or deadlocking function where the the key is retained and can only be removed with the shackle in the locked position (D).						
Finish	Body: Chrome plate. Shackle: Chrome plate.						
Cylinder	Rekeyable 334 type padlock cylinder. Inline pin cylinders can be keyed to 5 or 6 pins.						
Shackles	8.7mm diameter, 19, 25, 38, 48 & 90mm lengths.						
Special Keying	Locks can be keyed to a number of controlled and / or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication and can also include specially designed keying systems such as master key systems. This allows for different levels of mechanical access control. Bulk Locksmiths versions are available.						

 $\textbf{Note:} \ \textbf{Custom marking is available.} \ \textbf{Pricing and availability on application.}$

Standards and Compliance

SP6-8


Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade range from 6-8.



Corrosion Resistance Rating C4: Environments that are often wet and/or subject to slight pollution by sulphur dioxide, acid, alkali or salt, including some particularly damp interiors and the majority of exterior environments.



High Security Padlocks 334 Series Steel Body Padlocks

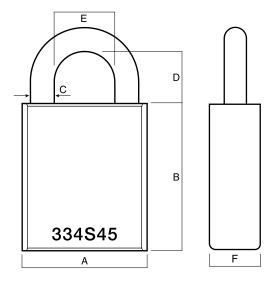



Specifications								
	Dime	ensions	(mm)					
Part Number	Α	В	C	D	E	F	Physical Security Rating	Corrosion Resistance Rating
334S45/519	45	55	8.7	19	22	20	SP8	C4
334B45/138	45	55	8.7	38	22	20	SP7	C4
334B45/148	45	55	8.7	48	22	20	SP7	C4
334B45/190	45	55	8.7	90	22	20	SP6	C4

Available Pack Variations											
Part Number	NDP	ВК	5KA	5KD	6KA	6KD	6KA	6KD	6МК		
334\$45		•	•	•	•	•	•	•	•		
334S45/519		•	•	•	•	•	•	•	•		
334\$45/538	•	•	•	•	•	•	•	•	•		
334S45/548		•	•	•	•	•	•	•	•		
334\$45/590			•	•	•	•	•	•	•		

High Security Padlocks 334C Series Shrouded Steel Body Padlocks



The Lockwood 334 Steel Series Padlock features shackles suitable for commercial and industrial high security and high corrosion applications offering added protection against attack.

Features

- Double ball locking
- Standard as latching function
- Can be converted to deadlocking (key retained) by simply relocating the cam plate pin in the cylinder assembly

Product Details							
Materials	Body: Steel. Shackle: Molybdenum steel.						
Function	Spring loaded shackle, available with latching function where the key can be removed with the shackle in the open position (L) or deadlocking function where the the key is retained and can only be removed with the shackle in the locked position (D).						
Finish	Body: Chrome plate. Shackle: Chrome plate.						
Cylinder	Rekeyable 334 type padlock cylinder. Inline pin cylinders can be keyed to 5 or 6 pins.						
Shackles	8.7mm diameter, 19mm length.						
Special Keying	Locks can be keyed to a number of controlled and / or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication and can also include specially designed keying systems such as master key systems. This allows for different levels of mechanical access control. Bulk Locksmiths versions are available.						

Note: Custom marking is available. Pricing and availability on application.

SP6-8


Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 8.



Corrosion Resistance Rating C4: Environments that are often wet and/or subject to slight pollution by sulphur dioxide, acid, alkali or salt, including some particularly damp interiors and the majority of exterior environments.



High Security Padlocks 334C Series Shrouded Steel Body Padlocks

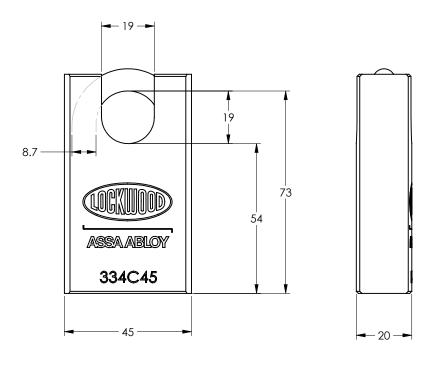




Specifications

Part Number	Physical Security Rating	Corrosion Resistance Rating
334C45/519	SP8	C4

Available Pack Variations								
Part Number	NDP	ВК	5KA	5KD	6KA	6KD	6МК	
334C45/519	•	•	•	•	•	•	•	

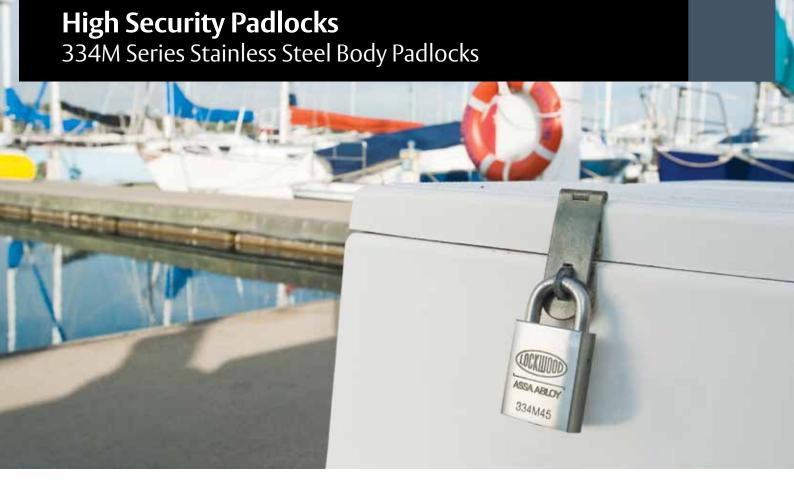

The Lockwood 334 Series Stainless Steel Padlock range features stainless steel shackles suitable for commercial and industrial high security and high corrosion marine applications.

Features

- Double ball locking
- Standard as latching function
- Can be converted to deadlocking (key retained) by simply relocating the cam plate pin in the cylinder assembly

Product Details						
Materials	Body: Stainless steel. Shackle: Stainless steel.					
Function	Spring loaded shackle, available with latching function where the key can be removed with the shackle in the open position (L) or deadlocking function where the the key is retained and can only be removed with the shackle in the locked position (D).					
Finish	Body: Natural material. Shackle: Natural material.					
Cylinder	Rekeyable 334 type padlock cylinder. Inline pin cylinders can be keyed to 5 or 6 pins.					
Shackles	8.7mm diameter, 19, 25, 38, 48 & 90mm lengths					
Special Keying	Locks can be keyed to a number of controlled and / or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication and can also include specially designed keying systems such as master key systems. This allows for different levels of mechanical access control. Bulk Locksmiths versions are available.					

 $\textbf{Note:} \ \textbf{Custom marking is available.} \ \textbf{Pricing and availability on application.}$

Standards and Compliance

SP6-8

are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade range from 5-7.


Physical Security grades




Corrosion Resistance Rating C5: Environments in very corrosive localities such as those subject to effect (or combination) of industrial and coastal conditions.



High Security Padlocks 334M Series Stainless Steel Body Padlocks

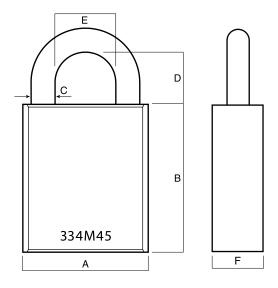

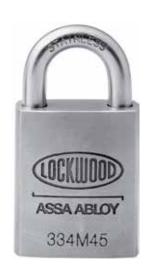

Specifications								
	Dime	ensions	(mm)					
Part Number	Α	В	c	D	E	F	Physical Security Rating	Corrosion Resistance Rating
334M45/619	45	55	8.7	19	22	20	SP7	C5
334M45/625	45	55	8.7	38	22	20	SP6	C5
334M45/638	45	55	8.7	38	22	20	SP6	C5
334M45/648	45	55	8.7	48	22	20	SP6	C5
334M45/690	45	55	8.7	90	22	20	SP5	C5

Available Pack Variations										
Part Number	NDP	ВК	5KA	5KD	6КА	6KD	6МК			
334M45		•	•	•	•	•	•			
334M45/619	•	•	•	•	•	•	•			
334M45/625		•	•	•	•	•	•			
334M45/638		•	•	•	•	•	•			
334M45/648		•	•	•	•	•	•			
334M45/690										



Maximum Security Padlocks

Maximum Security Padlocks 270 Series Steel Body Padlocks



The Lockwood 270 Series Steel Padlock features a high strength steel shackle designed for maximum security and high corrosion resistance including commercial and industrial applications.

Features

- Deadlocking double ball locking
- Standard as deadlocking (key retained) function
- Keyway dust cover

Product Details							
Materials	Body: Hardened steel. Shackle: Molybdenum steel.						
Function	Deadlocking function where the the key is retained and can only be removed with the shackle in the locked position (D).						
Finish	Body: Chrome plate. Shackle: Chrome plate.						
Cylinder	Rekeyable cylinder compatible with 570 type barrel. Inline pin cylinders can be keyed to 5 or 6 pins.						
Shackle	14mm diameter, 25mm length.						
Special Keying	Locks can be keyed to a number of controlled and / or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication and can also include specially designed keying systems such as master key systems. This allows for different levels of mechanical access control. Bulk Locksmiths versions are available.						

Note: Custom marking is available. Pricing and availability on application.

Standards and Compliance

SP9


Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 9




Corrosion Resistance Rating C4: Environments that are often wet and/or subject to slight pollution by sulphur dioxide, acid, alkali or salt, including some particularly damp interiors and the majority of exterior environments.



Maximum Security Padlocks 270 Series Steel Body Padlocks

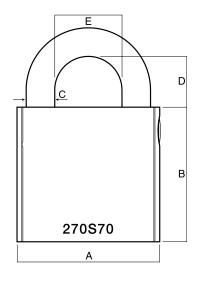





Specifications								
	Dime	ensions	(mm)					
Part Number	Α	В	c	D	E	F	Physical Security Rating	Corrosion Resistance Rating
270570/125	70	66	14	25	33	34	SP9	C4

Available P	ack Var	iations									
Part Number	ВК	5KA	5KD	6КА	6KD	6МК	D5KA	D5KD	D6KA	D6KD	D6MK
270570/125	•	•	•	•	•	•	•	•	•	•	•

Maximum Security Padlocks

290 Series Steel Body Monoblock Padlocks



The Lockwood 290 Series Steel Padlock features a high strength steel shackle designed for maximum security and high corrosion resistance including commercial and industrial applications.

Features

Standard as deadlocking function

Product Deta	ils
Materials	Body: Hardened steel. Shackle: Molybdenum steel.
Function	Deadlocking function where the the key is retained and can only be removed with the shackle in the locked position (D).
Finish	Body: Chrome plate. Shackle: Chrome plate.
Cylinder	Rekeyable cylinder compatible with 570 type barrel. Inline pin cylinders can be keyed to 5 or 6 pins.
Shackle	14.5mm diameter, 21.8mm vertical clearance.
Special Keying	Locks can be keyed to a number of controlled and / or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication and can also include specially designed keying systems such as master key systems. This allows for different levels of mechanical access control. Bulk Locksmiths versions are available.

Note: Custom marking is available. Pricing and availability on application.

Standards and Compliance

SP10

are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 10.


Physical Security grades



Corrosion Resistance Rating C4: Environments that are often wet and/or subject to slight pollution by sulphur dioxide, acid, alkali or salt, including some particularly damp interiors and the majority of exterior environments.




Maximum Security Padlocks 290 Series Steel Body Monoblock Padlocks

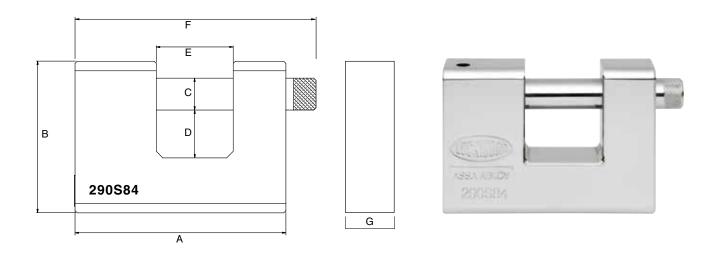

Specification	าร								
	Dime	ensions ((mm)						
Part Number	Α	В	c	D	E	F	G	Physical Security Rating	Corrosion Resistance Rating
290S84/120	96	69	14.5	21.8	35	110	30	SP10	C4

Available P	ack Va	riations									
Part Number	ВК	5KA	5KD	6KA	6KD	6МК	D5KA	D5KD	D6KA	D6KD	D6MK
290S84/120	•	•	•	•	•	•	•	•	•	•	•

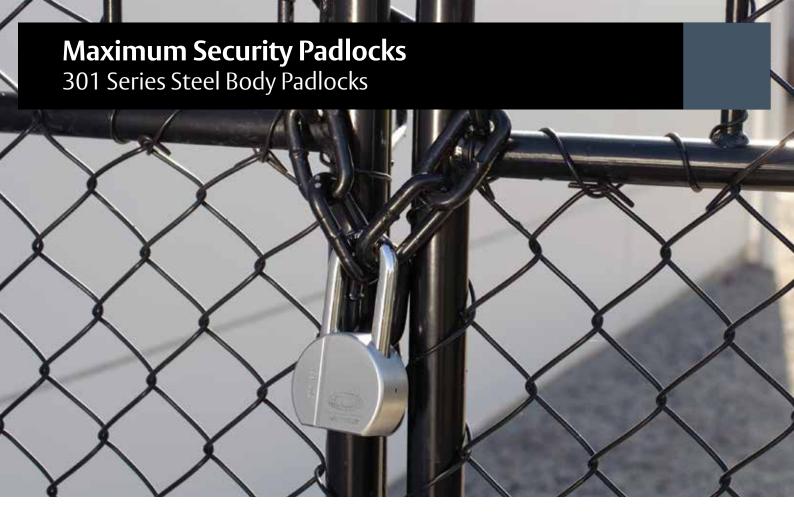

The Lockwood 301 Series Padlock features a high strength steel shackle designed for maximum security and high corrosion resistance including commercial and industrial applications.

Features

- Deadlocking double ball locking
- Standard as deadlocking (key retained) function

Product Details					
Materials	Body: Hardened steel. Shackle: Molybdenum steel.				
Function	Deadlocking function where the the key is retained and can only be removed with the shackle in the locked position (D).				
Finish	Body: Satin chrome pearl. Shackle: Chrome plate.				
Cylinder	Rekeyable cylinder compatible with 570 type barrel. Inline pin cylinders can be keyed to 5 or 6 pins.				
Shackle	11mm diameter, 48mm.				

Standards and Compliance


SP8


are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 8.

Physical Security grades

Corrosion Resistance Rating C4: Environments that are often wet and/or subject to slight pollution by sulphur dioxide, acid, alkali or salt, including some particularly damp interiors and the majority of exterior environments.

Maximum Security Padlocks 301 Series Steel Body Padlocks

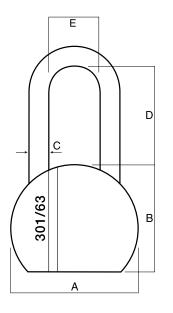





	Dime	ensions	(mm)					
Part Number	Α	В	C	D	E	F	Physical Security Rating	Corrosion Resistance Rating
301/63/154	63	55	11	48	24	28	SP8	C4

Part Number	NDP	
301/63/154	•	

Maximum Security Padlocks 356S Series Steel Body Padlocks



The Lockwood 356 Series Padlocks are a range of padlocks with steel and stainless steel bodies and shackles designed for maximum security and high corrosion resistance including commercial and industrial applications.

Features

- Double ball locking
- Extended shackle models
- Standard as deadlocking (key retained) function

Product Detail	S
Materials	Body: Steel. Shackle: Molybdenum steel.
Function	Spring loaded shackle, available with latching function where the key can be removed with the shackle in the open position (L) or deadlocking function where the the key is retained and can only be removed with the shackle in the locked position (D).
Finish	Body: Chrome plate. Shackle: Chrome plate.
Cylinder	Rekeyable 334 type padlock cylinder. Inline pin cylinders can be keyed to 5 or 6 pins.
Shackle	11mm diameter, 25 & 50mm lengths.
Special Keying	Locks can be keyed to a number of controlled and / or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication and can also include specially designed keying systems such as master key systems. This allows for different levels of mechanical access control. Bulk Locksmiths versions are available.

 $\textbf{Note:} \ \textbf{Custom marking is available.} \ \textbf{Pricing and availability on application.}$

Standards and Compliance

SP8


Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 8.




Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.



Maximum Security Padlocks 356 Series Steel Body Padlocks

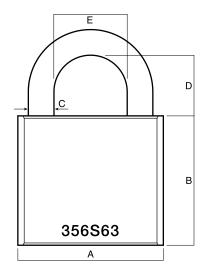





Specifications	
	Dimensions (mm)


	Dime	ensions	(mm)					
Part Number	Α	В	С	D	E	F	Physical Security Rating	Corrosion Resistance Rating
356S63/525	63	56	11	25	32	25	SP8	C3
356S63/550	63	56	11	50	32	25	SP8	C3

Available Pack	Variatio	ns					
Part Number	ВК	5KA	5KD	6КА	6KD	6МК	
356S63/525	•	•	•	•	•	•	

356S63/550

Maximum Security Padlocks

356M Series Stainless Steel Body Padlocks

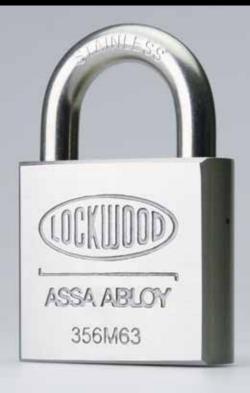

The Lockwood 356 Series Padlocks are a range of padlocks with steel and stainless steel bodies and shackles designed for maximum security and high corrosion resistance including commercial and industrial applications.

Features

- Double ball locking
- Extended shackle models
- Standard as deadlocking (key retained) function

Product Details					
Materials	Body: Stainless steel. Shackle: Stainless steel.				
Function	Spring loaded shackle, available with latching function where the key can be removed with the shackle in the open position (L) or deadlocking function where the the key is retained and can only be removed with the shackle in the locked position (D).				
Finish	Body: Natural material. Shackle: Natural material.				
Cylinder	Rekeyable 334 type padlock cylinder. Inline pin cylinders can be keyed to 5 or 6 pins.				
Shackle	11mm diameter, 25 & 50mm lengths.				
Special Keying	Locks can be keyed to a number of controlled and / or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication and can also include specially designed keying systems such as master key systems. This allows for different levels of mechanical access control. Bulk Locksmiths versions are available.				

 $\textbf{Note:} \ \textbf{Custom marking is available.} \ \textbf{Pricing and availability on application.}$

Standards and Compliance


SP8


Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 8.



Corrosion Resistance Rating C5: Environments in very corrosive localities such as those subject to effect (or combination) of industrial and coastal conditions.

Maximum Security Padlocks 356M Series Stainless Steel Body Padlocks

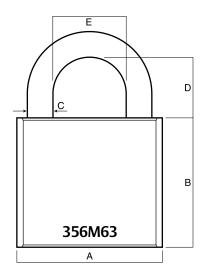





Specifications								
	Dime	ensions	(mm)					
Part Number	Α	В	C	D	E	F	Physical Security Rating	Corrosion Resistance Rating
356M63/525	63	56	11	25	32	25	SP8	C5
356M63/550	63	56	11	50	32	25	SP8	C5

Available Pacl	k Variatio	ns				
Part Number	ВК	5KA	5KD	6КА	6KD	6МК
356M63/525	•	•	•	•	•	•
356M63/550		•	•	•		•

PadlocksOrdering Procedure

Padlock Configuration Matrix (for Reference Only)

Sample part number 356S63/525/NDP is made up of several sections. Choose your product by selecting an option from each section.:

Padlocks Ordering Procedure

Padlock Series
334





D. II. 1. C. 1	
Padlock Series	
Value	110
High Security	120N
Value Dial Combination	
with Key Override	141
Value Wheel	
Combination	150
High Security	334
Maximum Security	356
Maximum Security	270
Maximum Security	290
Maximum Security	301

Nominal Size in mm	
Shackle Material	
Boron	1
Molybdenum	5
Stainless Steel	6
Polymer	8

Maximum Security	301
Body Configuration	
Brass	В
Steel	S
Closed (Shrouded) Steel	С

М

Stainless Steel (Marine Application)

Opening	& Keying
19	NDP
Shackle Opening	g
Nominal Vertical Clearance in mm	
Pack Types & Ke	ying
Single Display Pack	NDP
Two Display Pack	2NDP
Four Display Pack	4NDP
Keyed Alike	KA
5 Pin Random Keyed Alike Carton	RKA
5 Pin Keyed Alike	5KA
5 Pin Keyed to Diffe	er 5KD
6 Pin Keyed Alike	6KA
6 Pin Keyed to Diffe	er 6KD
6 Pin Master Keyed	6MK
Bulk	BK
Locksmith	LS
Random Codes Keyed Alike (141 Series)	RCKA
Alike Codes (140 Series)	AC
Random Codes (140 Series)	RC

Shackle


Pack Types

Please note: In order to simplify the process of ordering keyed alike and master keyed padlocks, the keying component is incorporated into the product number as shown in the diagram. This means there is no longer a requirement for separate keying charges on padlocks.

The master key MK code covers the following keying options: master keyed, grand master keyed and maison keyed.

When ordering MK padlocks please specify the keying details.

Part number convention is for reference only.

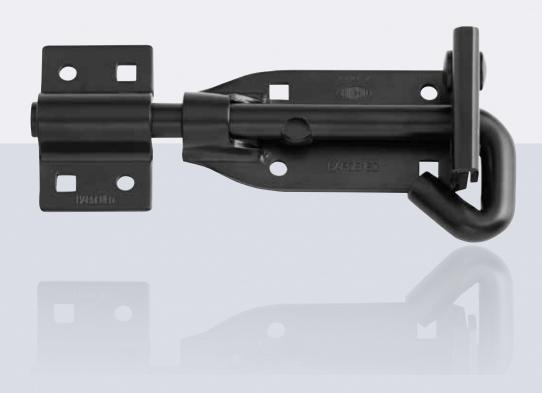

Padlock Accessories

Padbolt



Lockwood Padbolts are designed for both barrier and deterrent applications.

Features and Specifications

- Hardened steel shackle cover for added strength
- High cut resistant hardened steel construction
- Tamper resistant fasteners included
- 12.5mm bolt diameter

Security

Security Rating 7

Corrosion Rating 3

The security rating was achieved using the fasteners supplied in the pack. The use of fasteners other than those supplied may affect the security of this product.

Pack Variations

Available in display pack only.

Choosing the Right Padlock

For the best results it is recommended that a Lockwood padlock with the same security rating as the accessory is selected.

When the padlock and accessory are combined the lower of the two respective ratings will apply.

Product Details

Functions Durable hardended steel

Materials Corrosion resistant black coating

Standards and Compliance



Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 7




Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.

Designed and tested to the Australian Padlock Standard AS4145.4 2002 and are rated for both security and corrosion resistance.

Padbolt

Part Number	Description
PA/33/200/DP	200mm long heavy duty

Product Details – Dimensions										
	Α	В	c	D	E	F	G	Н	Security Rating	Corrosion Resistance Rating
PA/33/200/DP	200	52	20	38	40	63	12.5	11	7	3

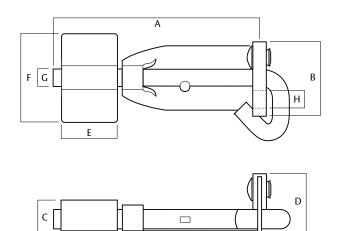



Locking Plates



Lockwood Locking Plates are designed for surface mounting and side mounting where general purpose security is required.

Features and Specifications

- High cut resistant hardened steel construction
- Bolt through fixing for added strength and security on surface mounted plates
- Tamper resistant concealed fixing on side mounted plates
- All fasteners included

Security

Security Rating 5 and 6

Corrosion Rating 3

The security rating was achieved using the fasteners supplied in the pack. The use of fasteners other than those supplied may affect the security of this product.

Pack Variations

Available in display pack only.

Choosing the Right Padlock

For the best results it is recommended that a Lockwood padlock with the same security rating as the accessory is selected.

When the padlock and accessory are combined the lower of the two respective ratings will apply.

Product Details

Functions Durable hardended steel

Materials Corrosion resistant black coating

Standards and Compliance

SP5/6

Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) Grade 5 for PA/14/70/DP & (SP) Grade 6 for PA/13/70/DP



Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.

Designed and tested to the Australian Padlock Standard AS4145.4 2002 and are rated for both security and corrosion resistance.

Locking Plates

PA/14/70/DP

75

35

Part Number	Description
PA/13/70/DP	For non-handed, surface mounted applications
PA/14/70/DP	For non-handed, side mounted applications

Product Details – Dimensions A B C D E Security Rating Corrosion Resistance Rating PA/13/70/DP 75 40 34 5 13 6 3


5

12


N/A

5

3



PA/13/70/DP



PA/14/70/DP

Locking Plates with Shackle Guard



Lockwood Locking Plates with Shackle Guard are designed for surface mounting where high security is required.

Features and Specifications

- Hardened steel shackle guard
- High cut resistant hardened steel construction
- Bolt through fixing for added strength and security
- High tensile 6mm coach bolts, nuts and washers included

Security

Security Rating 7

Corrosion Rating

The security rating was achieved using the fasteners supplied in the pack. The use of fasteners other than those supplied may affect the security of this product.

Pack Variations

Available in display pack only.

Choosing the Right Padlock

For the best results it is recommended that a Lockwood padlock with the same security rating as the accessory is selected.

When the padlock and accessory are combined the lower of the two respective ratings will apply.

Product Details

Functions Durable hardended steel

Materials Corrosion resistant black coating

Standards and Compliance

SP7

Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 7




Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.


Designed and tested to the Australian Padlock Standard AS4145.4 2002 and are rated for both security and corrosion resistance.

Locking Plates with Shackle Guard

Part Number	Description
PA/11/70/DP	For applications with hinges on the right and opening toward installer (LH).
PA/12/70/DP	For applications with hinges on the left and opening toward installer (RH).

Product Details – Dimensions									
	Α	В	С	D	E	F	Security Rating	Corrosion Resistance Rating	
PA/11/70/DP	70	40	39	5	13	50	7	3	
PA/12/70/DP	70	40	39	5	13	50	7	3	

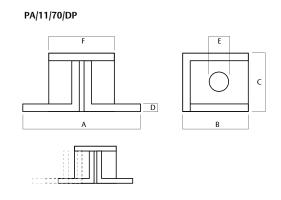

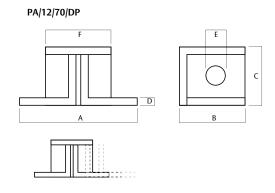

Hasp and Staples



Lockwood Hasp and Staples are designed for both barrier and deterrent applications.

Features and Specifications

- High cut resistant hardened steel construction with strengthening ribs and rolled edges for added protection
- Tamper resistant concealed fixing
- All fasteners included

Security

Security Rating 3 and 5

Corrosion Rating 3

The security rating was achieved using the fasteners supplied in the pack. The use of fasteners other than those supplied may affect the security of this product.

Pack Variations

Available in display pack only.

Choosing the Right Padlock

For the best results it is recommended that a Lockwood padlock with the same security rating as the accessory is selected.

When the padlock and accessory are combined the lower of the two respective ratings will apply.

Product Details

Functions Durable hardended steel

Materials Corrosion resistant black coating

Standards and Compliance

SP3/5

Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) Grade 3 for PA/21/90/DP & (SP) Grade 5 for PA/21/120/DP




Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.

Designed and tested to the Australian Padlock Standard AS4145.4 2002 and are rated for both security and corrosion resistance

Hasp and Staples


Part Number	Description
PA/21/90/DP	90mm long Hasp and Staple
PA/21/120/DP	120mm long Hasp and Staple

Product Details – Dimensions								
	Α	В	C	D	E	Security Rating	Corrosion Resistance Rating	
PA/21/90/DP	90	37	6.5	23	10	3	3	
PA/21/120/DP	120	45	7.5	28.5	12	5	3	

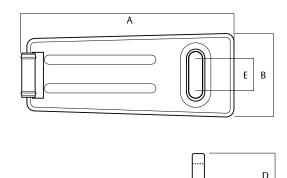



Hasp and Staples - Hinged

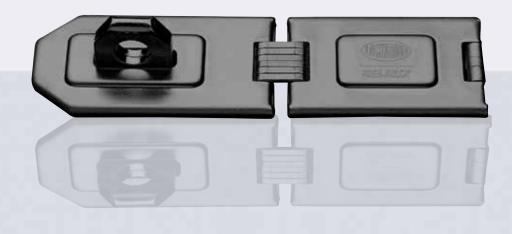

Lockwood Hinged Hasp and Staples are designed for general purpose security applications.

Features and Specifications

- Double hinged design for added flexibility
- High cut resistant hardened steel construction with strengthening ribs and rolled edges for added protection
- Tamper resistant concealed fixing
- All fasteners included

Security

Security Rating

Corrosion Rating 3

The security rating was achieved using the fasteners supplied in the pack. The use of fasteners other than those supplied may affect the security of this product.

6

Pack Variations

Available in display pack only.

Choosing the Right Padlock

For the best results it is recommended that a Lockwood padlock with the same security rating as the accessory is selected.

When the padlock and accessory are combined the lower of the two respective ratings will apply.

Product Details

Functions Durable hardended steel

Materials Corrosion resistant black coating

Standards and Compliance

SP6

Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) Grade 6




Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.

Designed and tested to the Australian Padlock Standard AS4145.4 2002 and are rated for both security and corrosion resistance

Hasp and Staples - Hinged

Part Number	Description
PA/23/160/DP	160mm long Hinged Hasp and Staple

Product Details – Dimensions							
	Α	В	c	D	E	Security Rating	Corrosion Resistance Rating
PA/23/160/DP	160	46	9	31	12.5	6	3

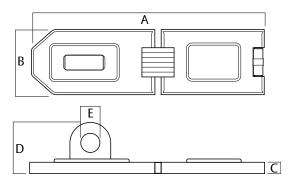

Hasp and Staples – Heavy Duty



Lockwood Heavy Duty Hasp and Staples are designed for high security applications.

Features and Specifications

- High cut resistant hardened steel construction
- Bolt through tamper resistant concealed fixing for added strength and security
- All fasteners included

Security

Security Rating 7

Corrosion Rating

The security rating was achieved using the fasteners supplied in the pack. The use of fasteners other than those supplied may affect the security of this product.

Pack Variations

Available in display pack only.

Choosing the Right Padlock

For the best results it is recommended that a Lockwood padlock with the same security rating as the accessory is selected.

When the padlock and accessory are combined the lower of the two respective ratings will apply.

Product Details

Functions Durable hardended steel

Materials Corrosion resistant black coating

Standards and Compliance



Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 7



Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.

Designed and tested to the Australian Padlock Standard AS4145.4 2002 and are rated for both security and corrosion resistance.




Hasp and Staples – Heavy Duty

Part Number	Desc	cripti	on				
PA/21/190/DP	190mm long Heavy Duty Hasp and Staple						
Product Detail	s – D	imer	sions				
	Α	В	c	D	E	Security Rating	Corrosion Resistance Rating

9.5 40

PA/21/190/DP

190

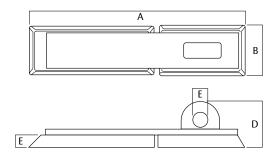

Padlock Chain



Lockwood Chains are designed for both general purpose and maximum security applications.

Features and Specifications

- Hardened manganese alloy steel chain for added strength
- High cut resistant hardened steel construction
- Accepts up tp 12.5mm padlock shackle diameter
- Tough fabric sleeve, shields the chain from the elements while reducing the chance of scratching
- 900mm in length

Security

Security Rating

Corrosion Rating 3

Pack Variations

Available in display pack only.

Choosing the Right Padlock

For the best results it is recommended that a Lockwood padlock with the same security rating as the accessory is selected.

When the padlock and accessory are combined the lower of the two respective ratings will apply.

Product Details

Functions Hardened manganese alloy steel

Materials High cut resistant hardened steel

Standards and Compliance

SP7

Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 7




Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.

Designed and tested to the Australian Padlock Standard AS4145.4 2002 and are rated for both security and corrosion resistance.

Padlock Chain

Part Number Description							
LCHL1/8/90/F	Harde	Hardened steel 900mm chain with fabric cover					
Product Details – Dimensions							
	Α	В	С	D	Security Rating	Corrosion Resistance Rating	
LCHL1/8/90/F	900	52	13	8	7	3	





Safety Lockout Padlocks

214 and 215 Series Aluminium Body Padlocks



The Lockwood 214 and 215
Aluminium Series Padlocks are
a range of durable, rugged and
lightweight 40mm aluminium
body padlocks with full commercial
grade special keying. The range has
been specifically designed to meet
the requirements of commercial
and industrial applications. Along
with a range of up to eight clearly
identified coloured jackets, it is ready
to be custom marked to make lock
identification easy.

Features and Specifications

- Self latching double ball locking
- Can be converted from self latching to deadlocking (key retained) by simply relocating the cam plate pin in the cylinder assembly
- Covers available in eight easily identified colours.

Product Detai	Product Details					
Materials	Body: Heavy duty, aluminium body extrusion. Shackle: Stainless steel.					
Function	Spring loaded shackle, available with latching function where the key can be removed with the shackle in the open position (L) or deadlocking function where the the key is retained and can only be removed with the shackle in the locked position (D).					
Finish	Body: anodized aluminum. Shackle: Natural material.					
Cylinders	Rekeyable 334 type padlock cylinder. Inline pin cylinders can be keyed to 5 or 6 pins.					
Shackles	214 Model: 5.0mm diameter, 19 & 50mm lengths. 215 Model: 6.4mm diameter, 19 & 50mm lengths.					
Special Keying	Locks can be keyed to a number of controlled and / or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication and can also include specially designed keying systems such as master key systems. This allows for different levels of mechanical access control. Bulk Locksmiths versions are available.					

Note: Custom marking is available. Pricing and availability on application.

Standards and Compliance

SP3-6

Physical Security grades are employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade range from 3-6.




Environments that are often wet and/or subject to slight pollution by sulphur dioxide, acid, alkali or salt, including some particularly damp interiors and the majority of exterior environments.


All products are designed and tested to the Australian Padlock Standard AS4145.4 2002 and are rated for both security and corrosion resistance.



214 and 215 Series Aluminium Body Padlocks





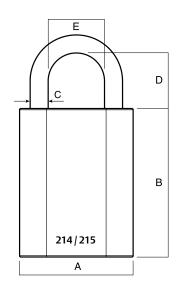

	Physical Security Rating	Corrosion Resistance Rating	Α	В	C	D	E	F
214A40/619	SP4	C4	40	52	5.0	19	21	19
214A40/650	SP3	C4	40	52	5.0	50	21	19
215A40/619	SP6	C4	40	52	6.4	19	20	19
215A40/650	SP5	C4	40	52	6.4	50	20	19

	RKA	ВК	5KA	5KD	6КА	6KD	6МК	DRKA	D5KA	D5KD	D6KA	D6KD	D6MK
214A40/619	•	•	•	•	•	•	•	•	•	•	•	•	•
214A40/650	•	•	•	•	•	•	•	•	•	•	•	•	•
215A40/619		•	•	•	•	•	•	•	•	•	•	•	•
215A40/650		•	•	•	•	•	•	•	•	•	•	•	•

Shackle Opening

Padlocks Ordering Procedure

Series Series	Material					
215	Α					
Padlock Series	;					
214 Series	214					
215 Series	215					
Body Material						
Aluminium A						

40 /	8
Body Size	
Nominal Size in mm	40
Shackle Material	
Stainless Steel	6

50		L	
Shackle Op	ening	5	
Nominal Size	in mn	ı	19
Nominal Size	in mn	ı	50
Function			
Latching			L
Deadlocking			D

Function

L		2
	Format	
19	Window Cover	
50		
	Colour	
	Red	
L	Orange	
D	Yellow	
	Green	

Format		Pac
Window Cover	1	Key
		5 Pi
Colour		5 P
Red	1	6 P
Orange	2	6 Pi
Yellow	3	6 Pi
Green	4	Bul
Blue	5	GEN
Purple	6	MT.
White	7	
Black	8	Note inser

Pack Types and Keying					
Keyed Alike	KA				
5 Pin Keyed Alike	5KA				
5 Pin Keyed to Differ	5KD				
6 Pin Keyed Alike	6KA				
6 Pin Keyed to Differ	6KD				
6 Pin Master Keyed	6MK				
Bulk	BK				
GEN6T Master Keyed	G6M				
MT5+ Master Keyed	MT5+				

e: For deadlocking function insert "D" in front of keying suffix. E.g. D6KD.



215P Series Plastic Body Padlocks



The Lockwood 215P Plastic Body Series Padlocks have been specifically designed for the electrical and mining safety lockout industries. When specified with a polymer shackle the padlock becomes completely nonconductive allowing for safety lockout within electrical applications.


Features and Specifications

- Excellent corrosion resistance
- All components are non-sparking
- All components are non-magnetic
- Meets OH&S guidelines of one employee, one padlock and one key
- Available in six colours
- Includes write on "Danger" label

Product Details					
Materials	Body: Plastic. Shackle: Plastic or brass.				
Function	Spring loaded shackle with deadlocking function where the the key is retained and can only be removed with the shackle in the locked position.				
Finish	Body: Coloured plastic. Shackle: Natural material.				
Cylinders	Rekeyable 334 type padlock cylinder. Inline pin cylinders can be keyed to 5 or 6 pins.				
Shackles	Available in 6mm diameter, 50mm long, brass and polymer shackles.				
Special Keying	Locks can be keyed to a number of controlled and / or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication and can also include specially designed keying systems such as master key systems. This allows for different levels of mechanical access control. The standard key supplied is the 6 pin restricted E3 profile. The key head is marked 'Safety Do Not Copy'. Bulk Locksmiths versions are available.				

215P Series Plastic Body Padlocks



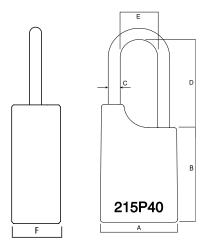

Dimensions (mm) **Part Number** В C D Ε 215P40/850 40 52 50 20 19 6

	6КА	6KD	BK
215P40/850	•	•	•
215P40/250	•	•	•
215P40/225	•	•	•

Padlocks Ordering Procedure

Padlock Series	Body Material	Body Size	Shackle Material
215	Р	40	8
Padlock Serie	?S	Body Width	
215 Series	215	Nominal Size in	ımm 4
Body Materia	I	Shackle Mate	erial
Plastic	Р	Brass	
		Polymer	

40		8
Body Width		
Body Width		
Nominal Size	n mm	40
Shackle Mat	erial	
Brass		2
Daluman		0

Shackle Opening	
Nominal Size in mm	50
Colour	
Red	1
Orange	2
Yellow	3
Green	4
Blue	5
White	7
Black	8

Colour

Shackle Opening

50

Pack Types and Keying				
6 Pin Keyed Alike	6KA			
6 Pin Keyed to Differ	6KD			
6 Pin Master Keyed	6MK			
Bulk	BK			




The Lockwood 225 Series Padlock is a zinc diecast padlock with a powdercoated finish.

Features and Specifications

- Powder coated brown body
- Hardened steel chrome plated shackle

Product Details				
Materials	Body: High purity, diecast, zinc alloy. Shackle: Hardened steel.			
Function	Spring loaded shackle with latching function where the key can be removed with the shackle in the open position.			
Finish	Body: Brown powder coat. Shackle: Chrome plate.			
Cylinder	Integrated 5 disc barrel.			
Shackles	6.4mm diameter, 19mm long.			



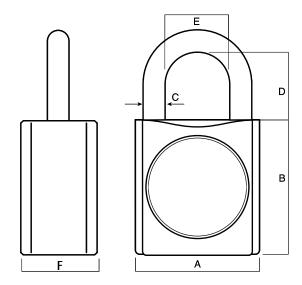

c D Ε F 225/40/119 38 38 6.4 19 19.5 20 Available Keying Configurations RKA KD LS KA 225/40/119

Padlocks Ordering Procedure





The Lockwood 325/35/123/003 padlock features a solid brass body with a red silicon jacket, coded to AU fire key code 003.

325/35/123/003 padlock is fully AS 4428.17:2024 compliant

Features and Specifications

- AS 4428.17-2024 compliant
- Design and tested to AS 4145.4-2002
- Double side locking
- Standard as latching function
- UV stabilized red silicon jacket for easy grip and identification
- Fire key 003 code

Product Detai	ils
Materials	Body: Brass Shackle: Hardened steel Cover: UV stabilized silicon rubber (red)
Function	spring loaded shackle with latching function (key removable in the open function).
Finish	Body: Natural material Shackle: Chrome plate

Standards and Compliance

SP4


employed for padlocks. These grades are defined in part by the effective differs and key combinations. Padlocks Physical Security (SP) grade 4.

Physical Security grades are



Corrosion Resistance Rating C3: Environments that are sometimes damp in the majority of normal rural and suburban localities, including interiors where condensation may occur.

Durability D2 25,000 key operation cycles Designed and tested to the Australian Padlock Standard AS4145.4 2002 and are rated for both security and corrosion resistance.

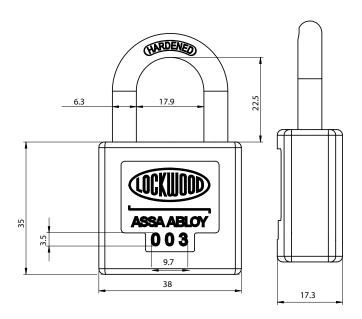

Part Number	Description
325/35/123/003	325 series padlock – AU 003 fire key TP



The Lockwood 312 Series Safety Lockout Padlocks are a durable and rugged brass padlock that has been specifically designed to meet the requirements of safety lockout applications.

Multiple departments or jobs can be easily identified using one of the jacket options. Laser etching is also optional for individual identification when using the windowed jacket.

Features and Specifications


- Primarily used for safety lock out applications
- 6 pin tumbler mechanism
- Self latching or deadlocking (key retained)
- Dual shackle locking points
- Coloured covers available for easy identification.


Product Details				
Materials	Body: Solid brass. Shackle: Stainless steel.			
Function	Spring loaded shackle, available with latching function where the key can be removed with the shackle in the open position (L) or deadlocking function where the the key is retained and can only be removed with the shackle in the locked position (D).			
Finish	Body: Natural material. Shackle: Natural material.			
Cylinders	Integrated cylinder, 6 pins.			
Shackles	4.8mm diameter, 19mm, 38mm and 50mm lengths.			

Note: Custom marking is available. Pricing and availability on application.







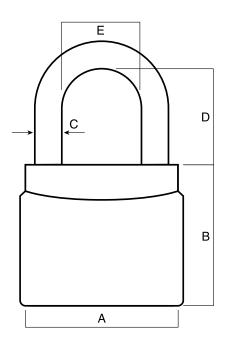

Product Details – Dimensions						
	Α	В	C	D	E	F
312##19	29	34	4.8	19	16	16
312##38	29	34	4.8	38	16	16
312##50	29	34	4.8	50	16	16

Available Keying Configurations						
	KD	KA	MK	LS		
312##19	•	•	•	•		
312##38	•	•	•	•		
312##50	•	•	•	•		

Note: To ensure key numbers are not duplicated padlocks must be ordered to a site specific key system. If padlocks are ordered without a site specific key system number quoted on the order, key numbers may be duplicated.

Padlocks Ordering Procedure

312	А		
Padlock Series			
312 Series	312		
Profile			
ALR	Α		
32R	В		
CNR	С		
32S (232 Standard Profile) E			

D	50
Function	
Deadlocking	D
Latching	L
Shackle Opening	g (mm)
19mm	19
38mm	38
50mm	50
Etching	
Single Sided	E1
Double Sided	E2
Leave blank if no et required	ching is

Shackle Opening

D		50	E1		RW
nction			Cover Colo	ur	
adlocking		D	Red Solid		RD
ching		L	Red Window		RW
		, ,	Orange Wind	low	OR
ackle Op	eni	ng (mm)	Yellow WIndo	ow	YE
mm		19	Green Windo	w	GR
mm		38	Blue Window	/	BL
mm		50	Purple Windo	ow	PU
			White Windo	w	WH
ching			Black Solid C	over	BK
gle Sided		E1	Black Window	N	BW
uble Sideo	1	E2	Grey Windov	v	GY
ave blank i Juired	fno	etching is	Red Window with "Danger Enter"		ot DD

Keying
KD

Keying	
Keyed to Differ	KD
Keyed Alike	KA
Locksmith	LS

312 Safety Lockout Hasp



Lockwood's unique patented Safety
Lockout Hasp design provides
protection for various portable
installations suitable for both single
and multipoint* locking applications.
This product provides maximum
protection when used in conjunction
with Lockwood's 312 Series padlocks
and ensures equipment can be
isolated and not activated again
until the repairs or maintenance are
completed.

The locked out device cannot be reactivated until all workers have signed off on their portion of the project and removed their padlock from the hasp.

Lockwood's guarantee of quality means that you can be confident in your choice of Lockwood Safety Lockout products.

*When used in conjunction with 312 cables sold seperately.

Product Details		
Materials	Shackle: Stainless Steel. Locking points: Stainless Steel. Rivets: Stainless Steel. Spring: Stainless Steel. Body: Galvanised Steel.	
Functions	Single action shackle release trigger. Piggy back function.	
Finish	Powdercoat red.	
Accessories	Red PVC coated cables are available separately for multi point locking in lengths of 1.5m, 6m, and 10m.	

312 Safety Lockout Hasp


Features and Specifications

- Multi-function Safety Lockout Hasp with the unique design cable locking feature
- Hardened Stainless Steel hasp
- Self-latching
- Single action shackle release trigger
- Six padlock holes accepts 312 Series padlocks
- Heavy duty stainless steel return spring
- Piggy back function
- Stainless steel body rivets
- Highly visible red powder coat finish
- Multi point locking (when used in conjunction with cable)


Part Numbers

Part Number	Description
312CABLE/R10000	312 Safety lockout cable red PVC (10M)
312CABLE/R6000	312 Safety lockout cable red PVC (6M)
312CABLE/R1500	312 Safety lockout cable red PVC (1.5M)
312HASP/55	312 Safety lockout hasp (55mm) Shackle

Dimensions

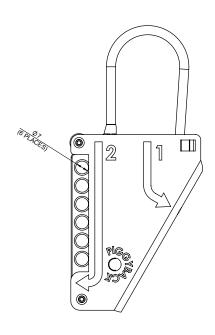



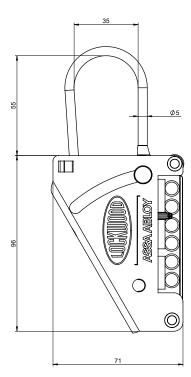

312 Covered Supervisors Hasp



This product is specifically designed for use with Lockwood's 312 Series padlocks and ensures equipment can be isolated and not activated again until repairs or maintenance is completed.

The locked out device cannot be reactivated until the Supervisors Padlock is unlocked. The Supervisors padlock is only accessible after all workers have signed off on their portion of the project and have removed their padlock from the hasp.

The hasp will lock over a 312 Series Padlock with 10 lockout positions and a window to view the laser etched details on the supervisor's padlock. It is available in two colours, yellow and blue to represent day shift and night shift workers.

Lockwood's guarantee of quality means that you can be confident in your choice of Lockwood Safety Lockout products.

Features

- Laser etched details window
- 10 lock out positions
- Powder coated yellow and blue finish options
- Durable zinc plated steel construction
- Cut-outs for reduced weight
- *312 padlocks sold separately.

Product Details

Materials

Body: Zinc Plated Steel.

Rivets: Aluminium / Steel.

Finishes Powder coat colours blue (BL) & yellow (YE).




312 Covered Supervisors Hasp

Part Numbers

Part Number	Description
312HASP/CS10BL	312 Covered Supervisor Hasp 10 Hole Blue
312HASP/CS10YE	312 Covered Supervisor Hasp 10 Hole Yellow

Dimensions

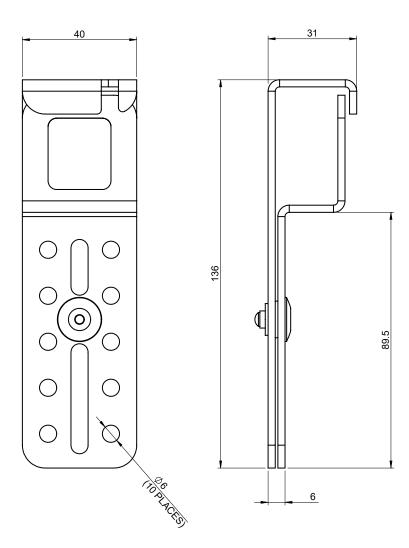

312 Series Safety Lockout Range - Accessories

Padlock Holder for 4 Padlocks Part Number 312HOLDER/4 Finish Black

The Lockwood 312 Holder/4 has the capacity to hold four 312 Lockwood Padlocks (19 mm – 80 mm shackle), a retractable 312 Keyline and 312 Series Safety Jaws.

The carry case is designed to be easily fitted onto your belt. The 312 Holder also includes a clear face compartment which makes identification easy.

Note: Padlocks and Accessories are ordered separately.



Padlock Holder for 6 Padlocks		
Part Number	312HOLDER/6	
Finish	Black	

The Lockwood 312 Holder/6 has the capacity to hold six 312 Lockwood Padlocks (19 mm – 80 mm shackle), a retractable 312 Keyline and the 312 Series Safety Jaws.

The carry case is designed to be easily fitted onto your belt. The 312 Holder also includes a clear face compartment which makes identification easy.

Note: Padlocks and Accessories are ordered separately.



Retractable Key Holder		
Part Number	312KEYLINE	
Finish	Chrome Plate/Black	

This compact retractable key holder incorporates a spring loaded mechanism, a robust steel cable line and key ring.

The built in clip allows easy fitting onto the 312 Holder, or can be used independently. The 312 Keyline ensures keys are easily accessible when needed.

Note: Padlocks and Accessories are ordered separately.



312 Series Safety Lockout Range - Accessories

Safety Lockout Jaws		
Part Number	Description	
312JAWS	25mm - 6 Holes	
312JAWS/7	25mm - 7 Holes	

The safety lockout jaws ensure that machinery stays 'locked out' until each person removes his/her padlock from the hasp. This prevents any accidental re-energising of machinery before crews have completed their work.

The 312 Jaw holds up to six 312 padlocks and is made from hardened steel with a vinyl coating.

Note: Padlocks and Accessories are ordered separately.



Trailer Air Coupling Locks



The Lockwood Air Coupling Locks have been designed for the securing of Truck (Trailer) and industrial compressed air line applications. When attached to the air line this product provides security and safety.

Security: Whereby the air brakes air line fitting is effectively sealed when the lock is attached, preventing connection to the opposing fitting. In the case of a Trailer application this reduces the risk of the trailer being connected to a truck without authorisation.

Safety: In an industrial application the sealing of the air line can reduce the risk of an accidental connection of equipment when shut down for maintenance etc.

The Lockwood Air Coupling Lock range consist of two series, the AL Series and the TL Series.

AL Series

The AL Series comes with an integrated cylinder that can be keyed to most restricted key systems.

It is available in two models to suit both the $\frac{1}{2}$ NPT female air coupling and the $\frac{1}{2}$ NPT male air coupling.



TL Series

The TL Series is locked with a padlock. The locking point allows for use of a padlock with under 10mm shackle diameter.

It is available in two models to suit both the ½"NPT female air coupling and the ½" NPT male air coupling.






Air Coupling Types


Air Coupling Types

Air Couplings come in different sizes, the AL & TL Series are designed to work with ½ inch couplings;


- 1/2" NPT male coupling = AL Series 63 or TL Series 1/2IN
- 1/2" NPT female coupling = AL Series 81 or TL Series 28MM


Note: Air Couplings are not supplied.





1/2" NPT male thread coupling





½" NPT female thread coupling

AL Series



AL Series


The AL Series comes with an integrated cylinder that can be keyed to most restricted key systems.

It is available in two models to suit both the ½"NPT female air coupling and the ½" NPT male air coupling.


Product Details		
Dimensions	Diameter: 45mm. Length: AL Series 63 - 96mm. AL Series 81 – 114mm.	
Materials	Inner Sleeve: Mild steel. Outer Sleeve: Case hardened steel.	
Function	Spring loaded function allowing for quick snap-on attachment to ½ inch air coupling fittings. Locked and unlocked by integrated cylinder. Key retained in unlocked position.	
Finish	Chrome Plate (CP).	
Cylinder	AL Series - 577 Synergy 3500 Series dual access lower cylinder.	
Special Keying	Locks can be keyed to a number of controlled and/ or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication and can also include specially designed keying systems such as master key systems. This allows for different levels of mechanical access control.	

AL Series

AL Series 63



AL Series 81

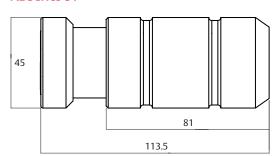

Part Numbers

Part Number	Description	Coupling Type
AL1/2/63MM##	AL Series 63 Air Coupling Lock	½" NPT male thread coupling
AL1/2/81MM##	AL Series 81 Air Coupling Lock	½" NPT female thread coupling

Note: ## in part number is exchanged for keying type.

KD = Keyed to Differ (Standard C4 profile 6 pin)

KA = Keyed Alike (Standard C4 profile 6 pin)

MK = Master Keyed (Standard C4 profile 6 pin)

TL Series



TL Series

The TL Series is locked with a padlock. The locking point allows for use of a padlock with under 10mm shackle diameter.


It is available in two models to suit both the ½"NPT female air coupling and the ½" NPT male air coupling.•


Product Details		
Dimensions	Diameter: 38mm. Length: TL Series 1/2IN – 59mm. TL Series 28 – 79mm.	
Materials	Inner Sleeve: Mild steel. Outer Sleeve: Case hardened steel.	
Function	Spring loaded function allowing for quick snap-on attachment to ½ inch air coupling fittings.	
Finish	Satin Chrome Pearl (SP).	
Locking	The TL Series is locked by padlock. Padlocks are available separately and not included.	
	Suits padlocks with a shackle diameter of under 10mm and minimum clearance height of 38mm.	

TL Series

TL Series 1/2IN

TL Series 28MM

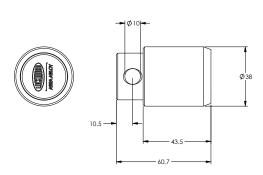

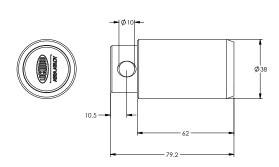

Part Numbers

Part Number	Description	Coupling Type
TL1/2IN	TL Series 1/2IN Air Coupling Lock	½" NPT male thread coupling
TL28MM	TL Series 28MM Air Coupling Lock	1/2" NPT female thread coupling

Note: Padlocks are available separately and not included.



Lockwood is the leading brand in the Australian locking industry. With an established reputation for high quality products, this iconic brand provides a wide range of locking solutions to residential housing, commercial building and industrial application markets. Lockwood is supported by an extensive distribution and aftersales support network. Our customers include retailers, architects, trade and industrial personnel, locksmiths and security dealers.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

ASSA ABLOY is represented in all major regions, in both mature and emerging markets, with leading positions in Australia, Europe and North America.



The Lockwood 25 Year Mechanical Warranty

Our belief that we manufacture the finest premium products available in today's market place is backed by the Lockwood 25 Year Mechanical Warranty, ensuring that Lockwood continues to keep Australians safe by delivering security and peace of mind.

For warranty terms and conditions, please visit www.lockweb.com.au or call 1300WARRANTY

ASSA ABLOY Australia Pty Ltd 235 Huntingdale Road Oakleigh, Victoria, 3166 Australia

1300 LOCK UP (1300 562 587) lockweb.com.au

ASSA ABLOY New Zealand Ltd 6 Armstrong Road Albany, Auckland, 0632 New Zealand

info.nz@assaabloy.com Telephone +64 9415 7111 assaabloy.co.nz

Disclaimer