2616EMCD & 2616CO SERIES

ELECTROMECHANICAL HOLD OPEN DOORCLOSER

PULL SIDE / INACTIVE LEAF

Power Size	Max. Door Width	Max. Door Weight	Max. Door Opening	Min. Closing Torque	Number Turns
EN1	750mm	20kg	175°	9Nm	1
EN2	850mm	40kg	175°	13Nm	2
EN3	950mm	60kg	175°	18Nm	4*
EN4	1100mm	80kg	175°	26Nm	6
EN5	1250mm	100kg	175°	37Nm	9
EN6	1400mm	120kg	175°	54Nm	13

* - Factory default setting

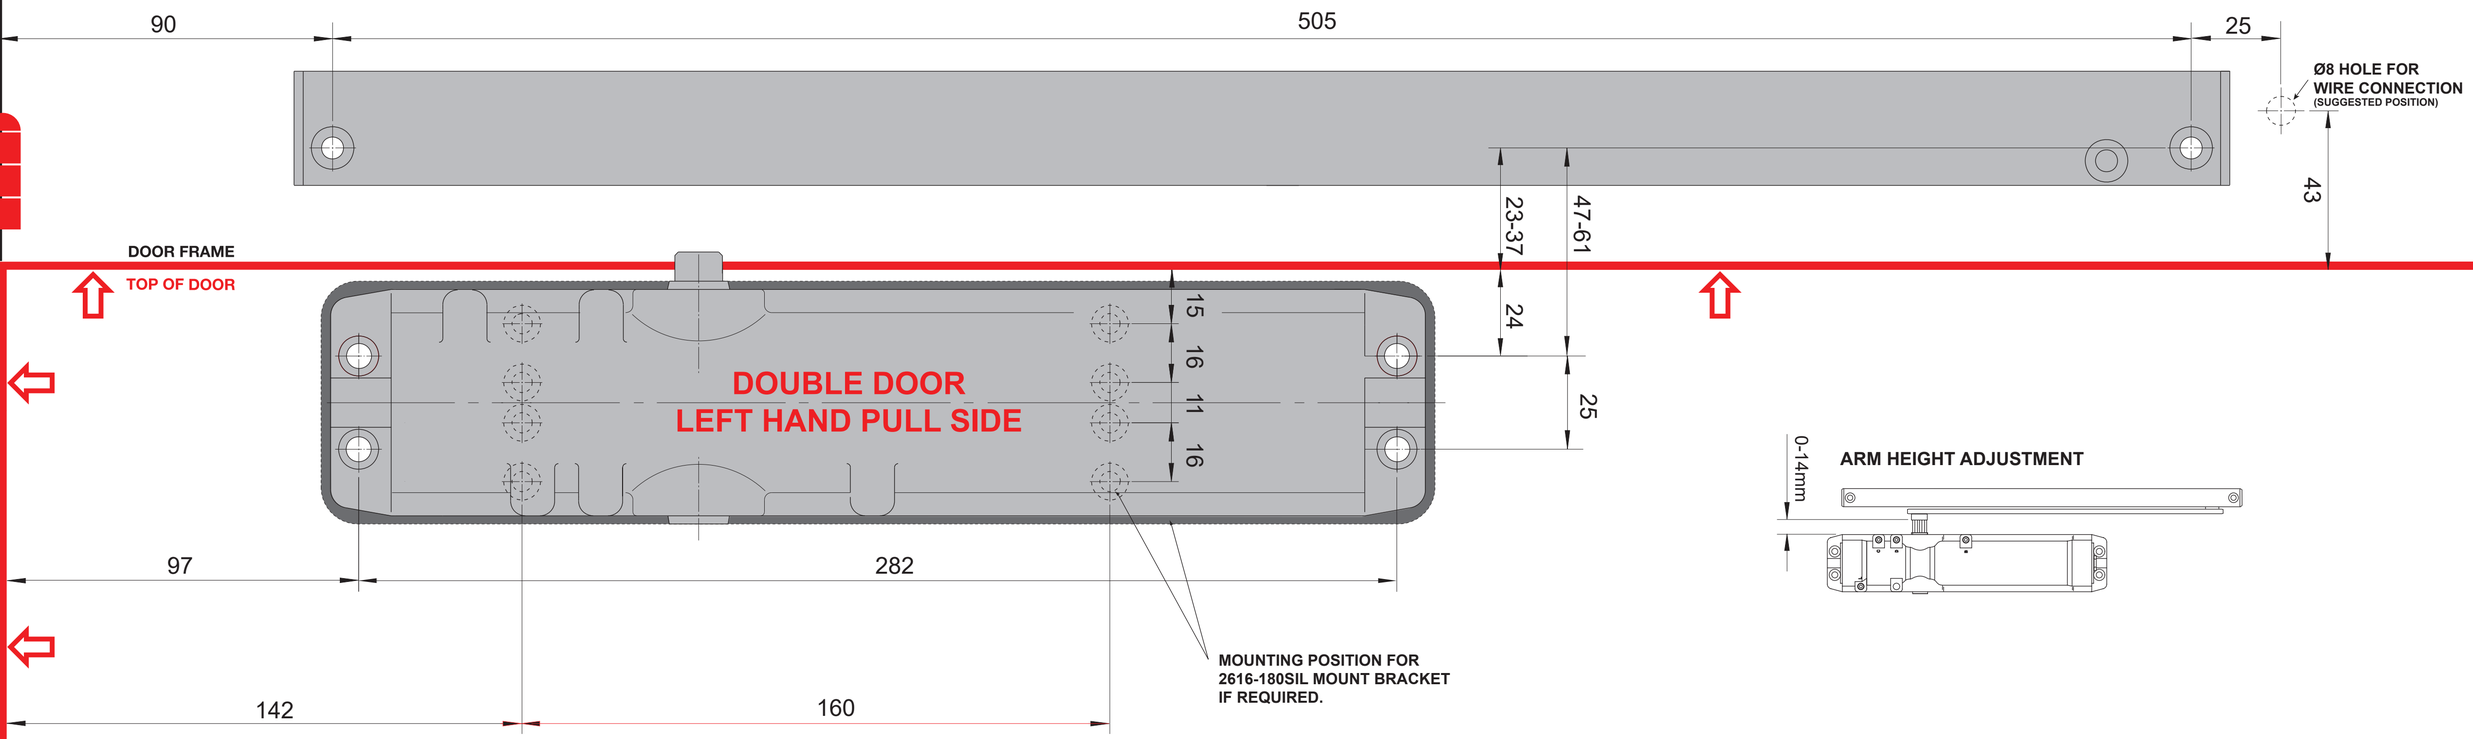

USE THIS TEMPLATE IN CONJUNCTION WITH THE 2616EMCD & 2616CO INSTALLATION INSTRUCTION (SUPPLIED)

Align template to door.
Mark & drill 4 body mounting holes and 2 slide rail holes.

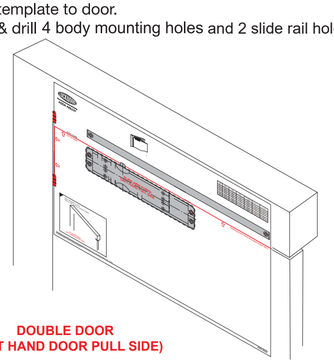

DOUBLE DOOR
(LEFT HAND DOOR PULL SIDE)

PRE-LOADING OF THE ARM

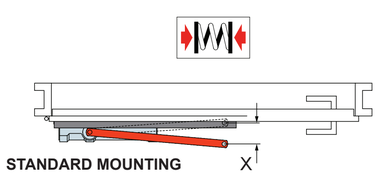

X=min 10mm...
max 70mm

Preload pinion as shown and assemble arm to pinion.

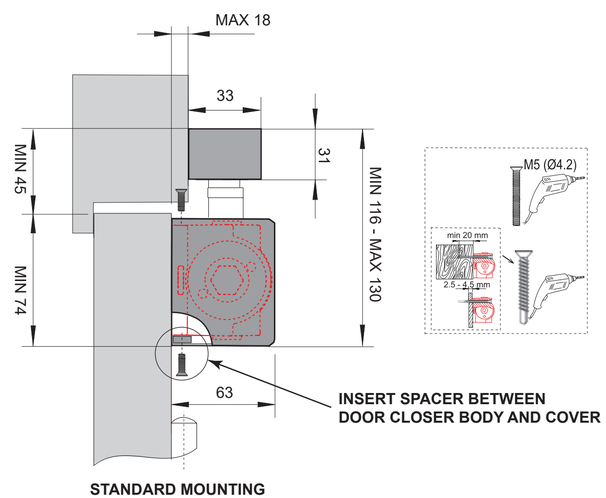

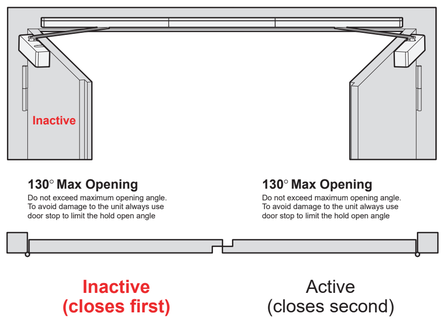

2616EMC-021 (1)

ASSA ABLOY Australia Pty Limited, 235 Huntingdale Rd, Oakleigh, VIC 3166 ABN 90 086 451 907 ©2025
Experience a safer and more open world