


| Power Size | Max. Door Width | Max. Door Weight | Max. Door Opening | Min. Closing Torque | Number Turns |
|------------|-----------------|------------------|-------------------|---------------------|--------------|
| EN1        | 750mm           | 20kg             | 175°              | 9Nm                 | 1            |
| EN2        | 850mm           | 40kg             | 175°              | 13Nm                | 2            |
| EN3        | 950mm           | 60kg             | 175°              | 18Nm                | 4*           |
| EN4        | 1100mm          | 80kg             | 175°              | 26Nm                | 6            |
| EN5        | 1250mm          | 100kg            | 175°              | 37Nm                | 9            |
| EN6        | 1400mm          | 120kg            | 175°              | 54Nm                | 13           |

\* - Factory default setting


ARM HEIGHT ADJUSTMENT

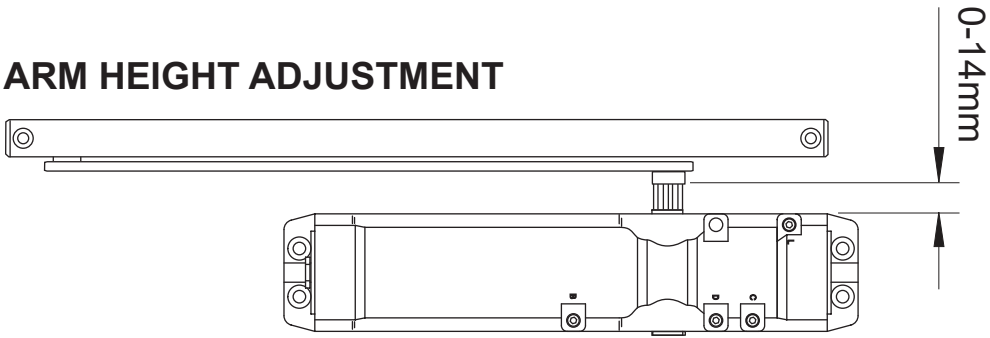

2616EMCD & 2616CO SERIES  
ELECTROMECHANICAL HOLD OPEN DOORCLOSER  
PUSH SIDE / INACTIVE LEAF



ASSA ABLOY

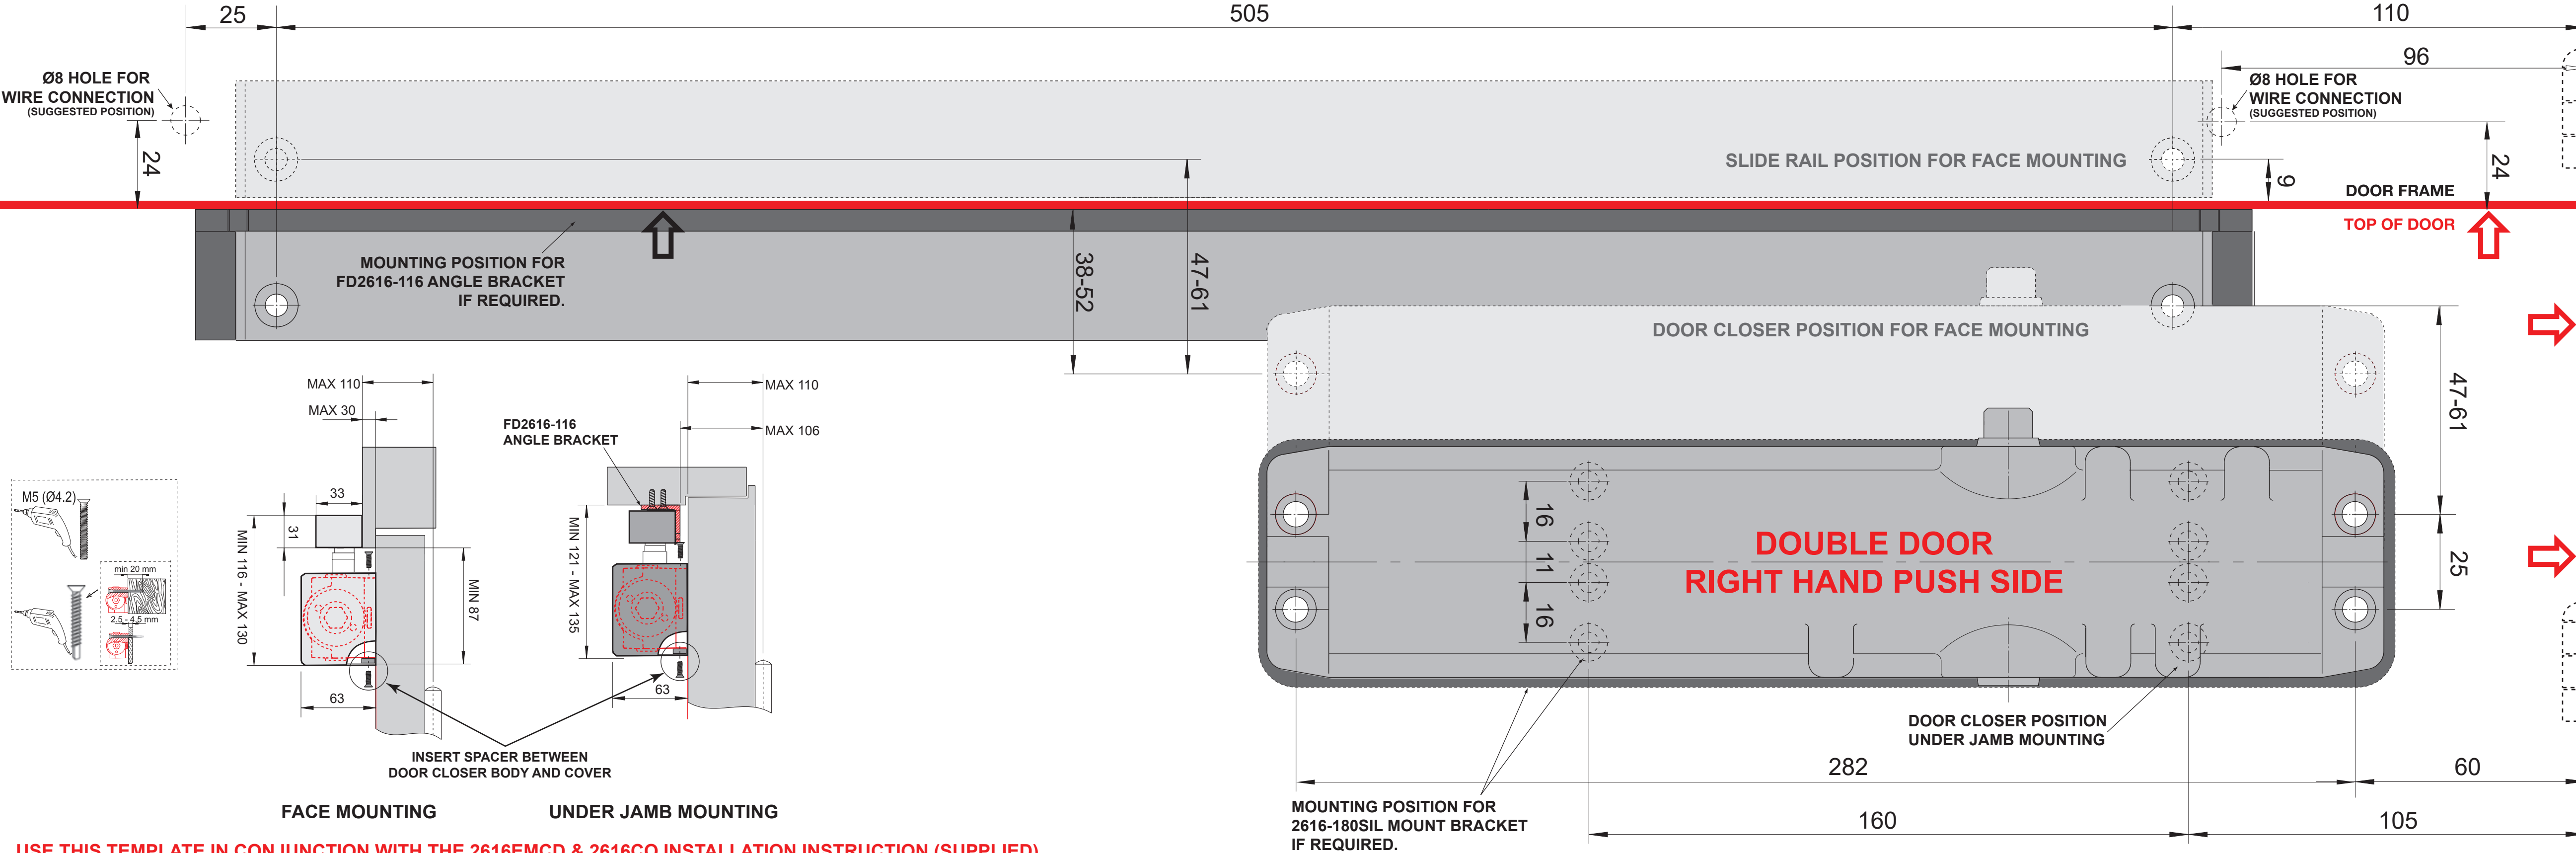

USE THIS TEMPLATE IN CONJUNCTION WITH THE 2616EMCD & 2616CO INSTALLATION INSTRUCTION (SUPPLIED)

