


Power Size	Max. Door Width	Max. Door Weight	Max. Door Opening	Min. Closing Torque	Number Turns
EN1	750mm	20kg	175°	9Nm	1
EN2	850mm	40kg	175°	13Nm	2
EN3	950mm	60kg	175°	18Nm	4*
EN4	1100mm	80kg	175°	26Nm	6
EN5	1250mm	100kg	175°	37Nm	9
EN6	1400mm	120kg	175°	54Nm	13

* - Factory default setting

2616 SERIES SIZE 1 - 6 CAM ACTION DOORCLOSER

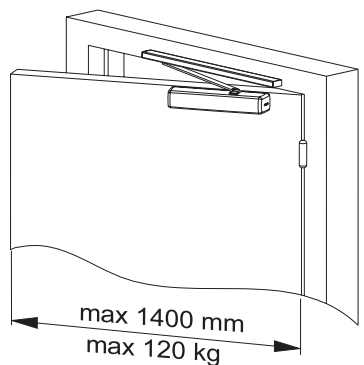

SLIDE ARM FIXING
(RIGHT HAND DOOR PULL SIDE)

485

102

TURN UPSIDE DOWN FOR OVER DOOR MOUNTING





DOOR FRAME

TOP OF DOOR



ARM HEIGHT ADJUSTMENT

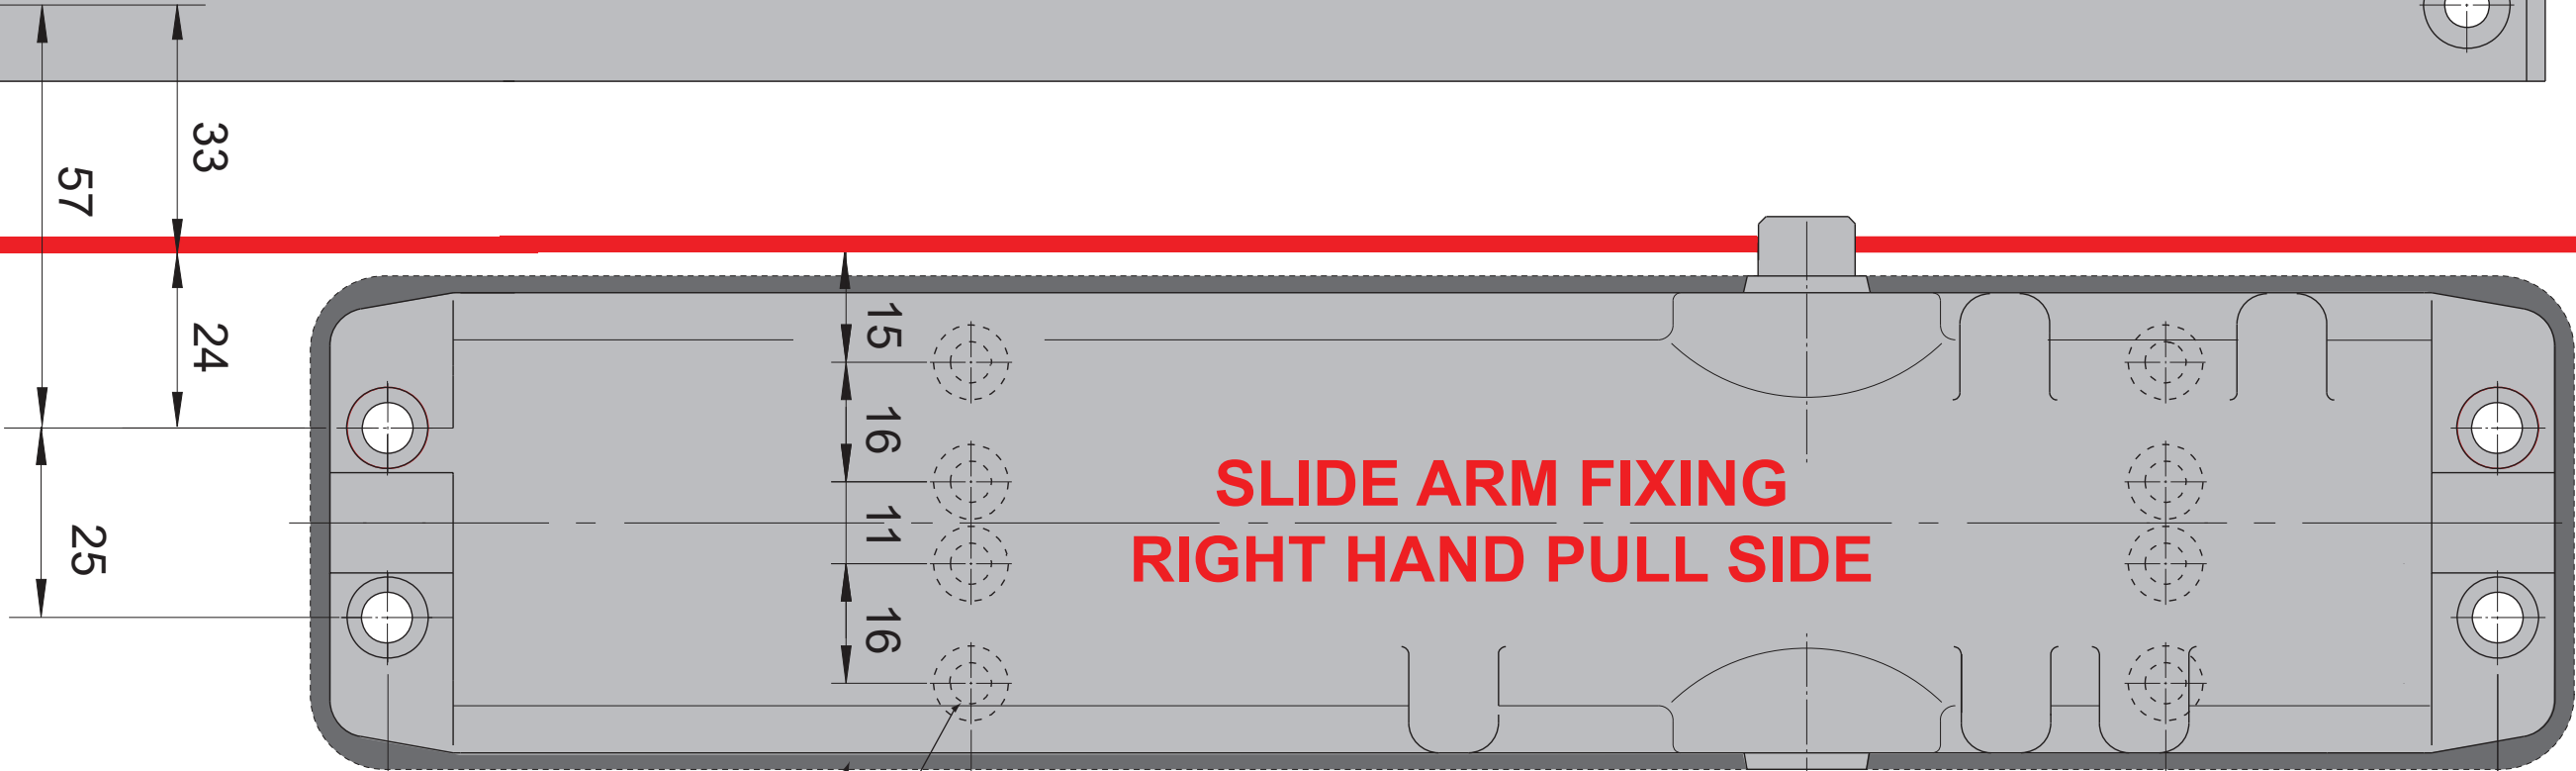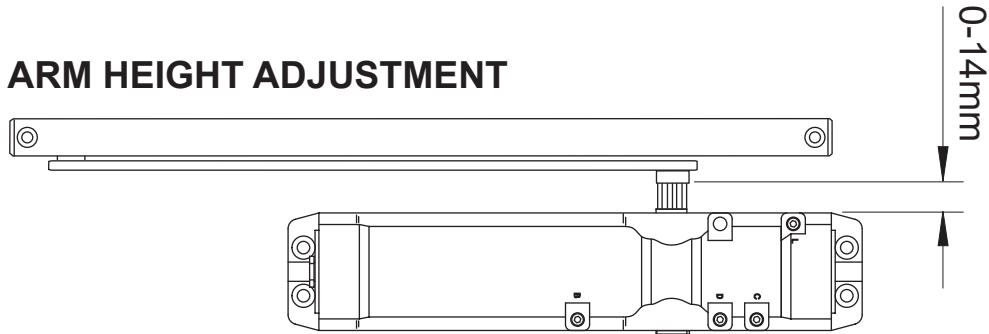

MOUNTING POSITION FOR
2616-180SIL MOUNT BRACKET
IF REQUIRED.

USE THIS TEMPLATE IN CONJUNCTION WITH THE 2616 INSTALLATION INSTRUCTION (SUPPLIED)

Align template to door.
Mark & drill 4 body mounting holes and 2 slide rail holes.

SLIDE ARM FIXING
(RIGHT HAND DOOR PULL SIDE)

PRE-LOADING OF THE ARM

STANDARD MOUNTING

OVER DOOR MOUNTING

X=min 10mm...
max 70mm

Preload pinion as shown and assemble arm to pinion.

MAX 18

MIN 108 - MAX 122

MIN 36 MIN 72

33

23

63

STANDARD MOUNTING

M5 (Ø4.2)

min 20 mm

2.5 - 4.5 mm

MAX 60

MIN 108 - MAX 122

MIN 72 MIN 36

63

23

33

OVER DOOR MOUNTING

